


## IP Packets

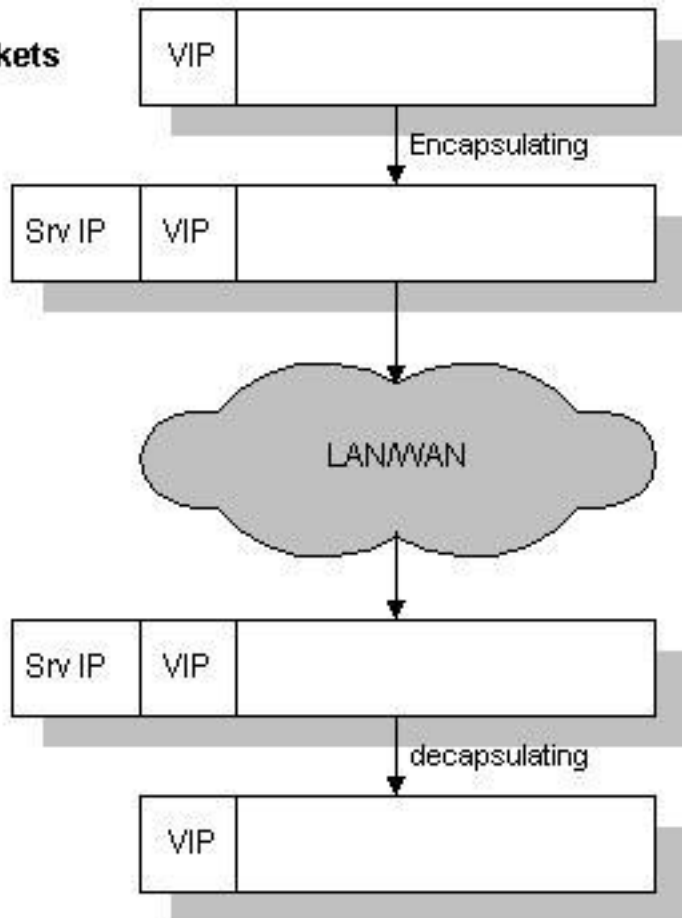

## LinuxDirector

Select one real server; encapsulate and forward it to the real server. LinuxDirector is on the client-to-server half connection.

## The real server

Decapsulate the packet, and process the packet locally and send response packet to the client directly.